



2.54mm Pin Header(Smt)

only focus on. connection .areas


SPECIFICATION

Current Rate:3 AMP
Insulation Resistance:1000MΩ min
Contact Resistance:20mΩ MAX
Dielectric Voltage:1000V AC for one minute
Operation Temperature: -40°C to +105°C


MATERIAL

Insulator: Polyester, UL 94V-0
Standard: PA9T & PBT, Black
Contact Pin: Brass SQ0.64
Finish: tin, Gold plated
Standard: Gold Flash all over
Poles: 1~40P & 1x2~2x40P


Recommend Mating Pin Header: FH6-

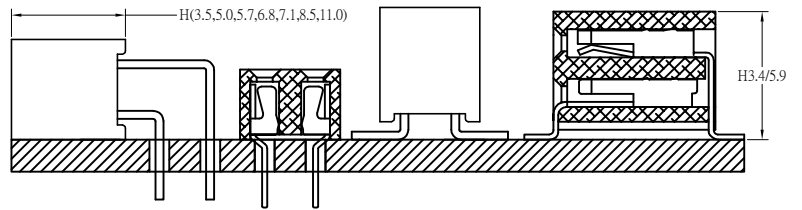


Smt Type(VM)

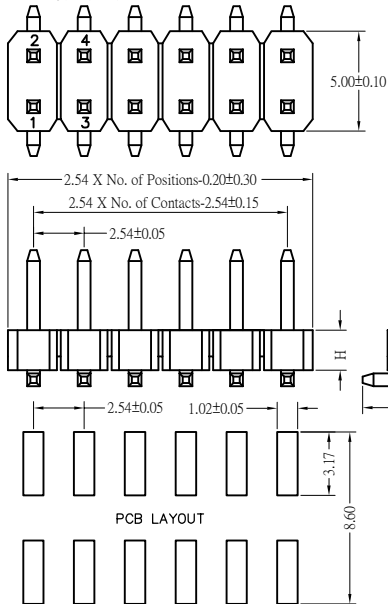

Single Row



Smt Type(VM)

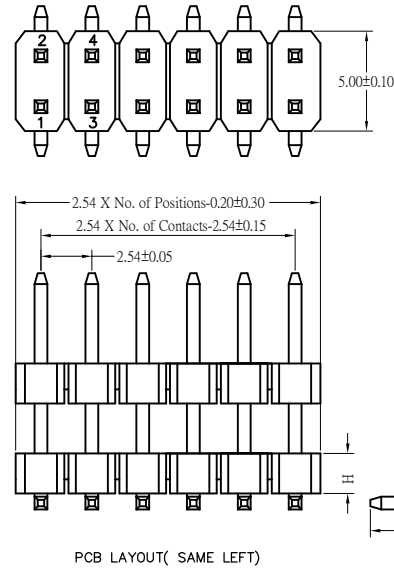


PCB LAYOUT(SAME LEFT)


Dimension Tab			
Dimension	A	B	C
Standard	6.00	7.50	0
Customer			

Dimension Tab			
Dimension	A	B	C
Standard	6.00	7.50	0
Customer			


Smt Type(AM)

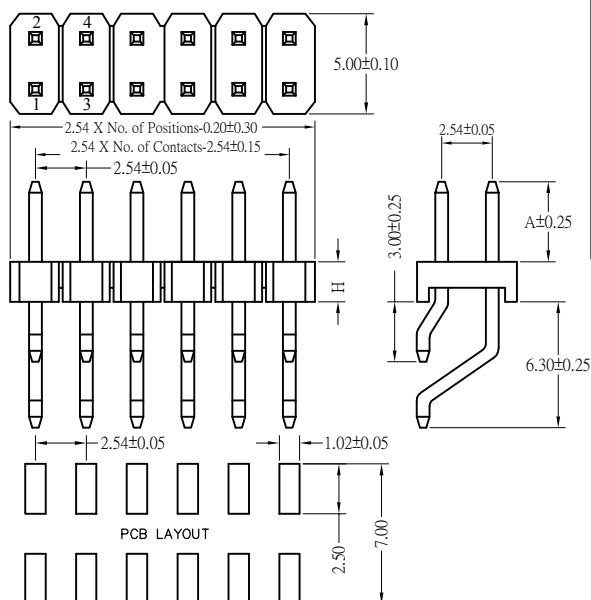

Single Row



Smt Type(VM)

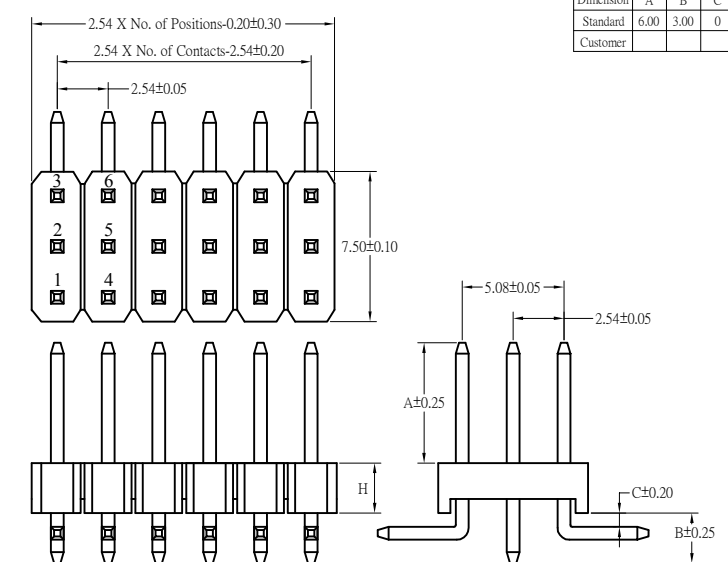

Dimension Tab			
Dimension	A	B	C
Standard	6.00	3.00	0
Customer			

Order Information
PH6-2101P-AMGOXXX-R01

PH	HOUSING					CONTACT					Packing			
	X	-	X	XX	XX	X	-	X	X	XX	XXX	-	X	01
PH:Pin Header FH:Female Header	1:0.8Pitch 2:0.8*1.0Pitch 3:1.0Pitch 4:1.27Pitch 5:2.0Pitch 6:2.54Pitch		1:Single Row 2:Dual Row 3:Three Row	No.of Pins 01~100	1:H1.0 2:H1.5 3:H2.0 4:H2.5	B:PBT P:PA9T L:LCP	V:Vertical A:Angle	D:DIP M:SMT	GO:Gold Flash G3:Gold 3u* GN:Gold Flash/Tin Ti: Tin		Pin Lentgh		P:PE R:Reel T:Tube B:Box	01.....

Http://www.xzhcon.com
E-Mail: sales@xzhcon.com(CON: andyxu, M/B: 13926894470)

TEI: 0769-8177312
FAX: 0769-82937977