



2.54mm Female Header(Dip)

only focus on. connection .areas

SPECIFICATION

Current Rate: 3 AMP

Insulation Resistance: 1000M Ω min

Contact Resistance: 20mΩ MAX

Dielectric Voltage:1000V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0


Standard: PA9T & PBT ,Black

Contact Pin: Phosphor Bronze

Finish: tin,Gold plated




Standard: Gold Flash all over

Poles: 2~40P & 1x2~2x40P

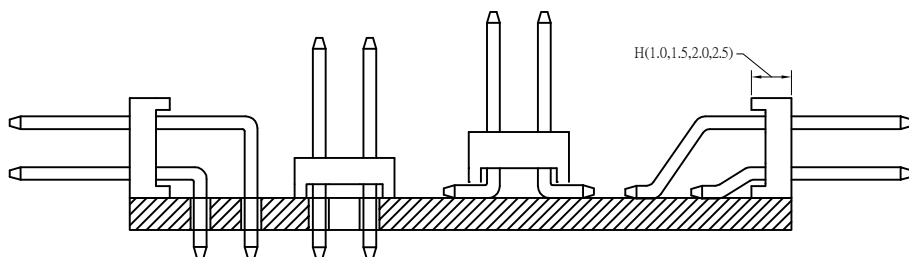


Recommend Mating Pin Header:PH6—




DIP Type(VD)

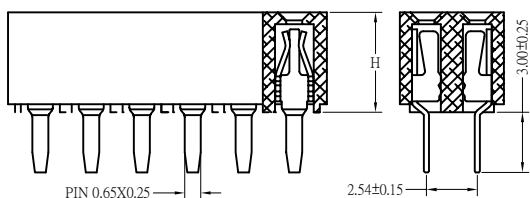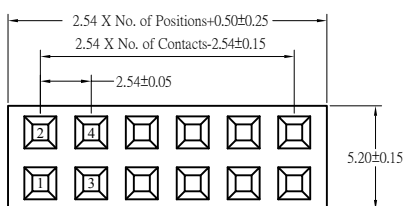


Single Row





DIP Type(WVD)

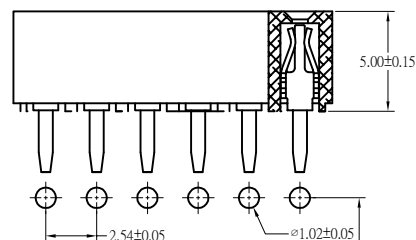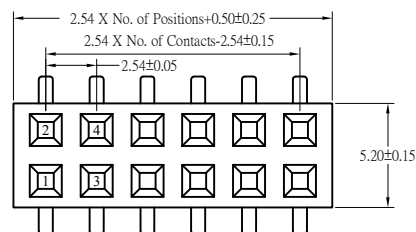

Single Row




DIP Type(AD)


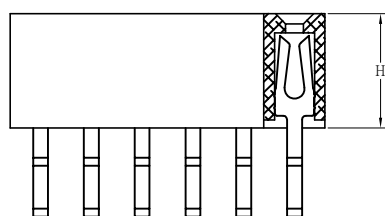
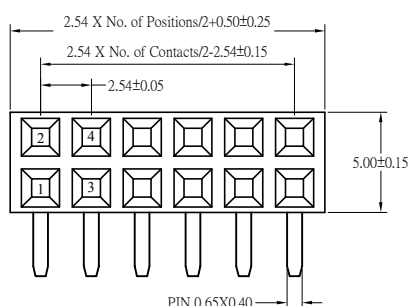


PCB LAYOUT Same TOM

Single Row



Smt Type(AD)

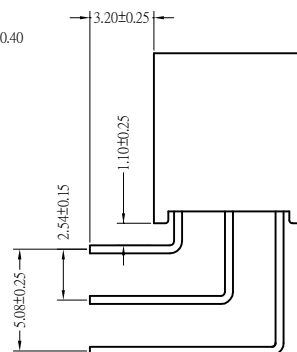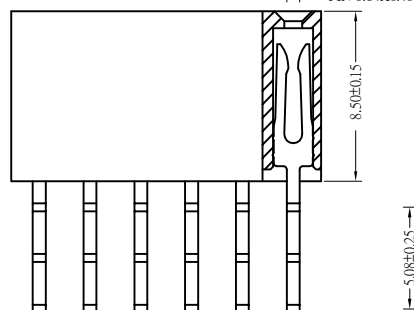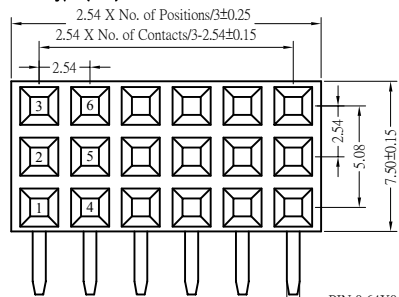

Order Information

FH6-2101P-ADGOY-B01

FH	HOUSING						CONTACT					Packing		
	X	-	X	XX	XX	X	-	X	X	XX	X	-	X	01
PH: Pin Header FH: Female Header	1: 0.8Pitch 2: 0.8*1.0Pitch 3: 1.0Pitch 4: 1.27Pitch 5: 2.0Pitch 6: 2.54Pitch		1: Single Row 2: Dual Row 3: Three Row	No.of Pins 01~100	1:H3.5 7:H8.3 2:H5.0 8:H8.5 3:H5.7 9:H11.0 4:H5.9 5:H6.8 6:H7.1	B: PBT P: PA9T L: LCP	V: Vertical A: Angle	D: DIP M: SMT	GO: Gold Flash G3: Gold 3u" GN: GF/Tin	U: Contact type Y: Contact type		P: PE R: Reel T: Tube B: Box		01.....

[Http://www.xzhcon.com](http://www.xzhcon.com)

E-Mail: sales@xzhcon.com(CON: andyxu, M/B: 13926894470)

TEL: 0769-8177312

FAX: 0769-82937977